

The Wayback Machine - http://web.archive.org/web/20150314005054/http://www.metacrylics.com:80/application/over-bur-mineral-surfaced-granulated-ca...


[Home](#)»[Application](#)»[Over BUR Mineral Surfaced Granulated Cap Sheet](#)

Metacrylics® Application Over BUR Mineral Surfaced Granulated Cap Sheet

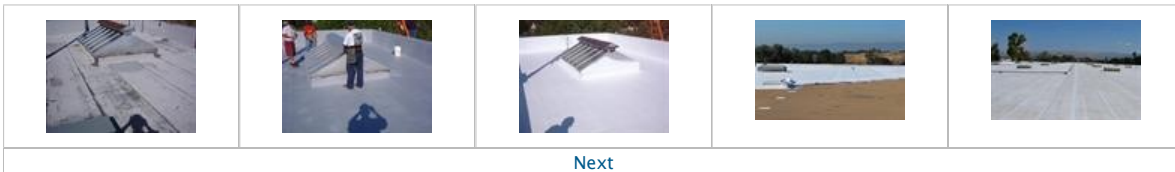
[Printer-friendly version](#)


BUR: "Built-Up Roofing" is usually 2-4 plies of roofing adhered with hot tar and using either a mineral surfaced Cap Sheet or loose gravel applied to the final layer for fire protection.

Metacrylics® Application Chart Application Rate per 1 Roofing SQ (100 sf). Please click on the yellow highlighted boxes below to see the application instructions. Note: CAD drawings are available by clicking on "PRODUCTS" at the top of this page.

Warranty		Materials Required for 100 ft² (1 Roofing Square)				
C=Coating M=Material NDL=Mat'l & Labor	Length	Clear Acrylic Base	Acrylic WHITE	Stitchbond Polyester Fabric	3-Course Penetrations etc.	3-Course all the Cap Sheet overlap seams With 6 inch Fabric
Coating	5-Year	1 gal	1.5 gal	-	-	-
Coating	10-Year	1 gal	3 gal	-	-	-
Material	10-Year	3 gal	3 gal	Ponding Areas	Yes	Yes
Material	15-Year	2 gal	5 gal	1-Ply	Yes	-
M/NDL	20-Year	2 gal	7 gal	1-Ply	Yes	-
M/NDL	30-Year	5 gal	9 gal	2-Ply	5-Course	-

Metacrylics® in Action


[Next](#)

Visit our [YouTube Profile](#) to see videos of Metacrylics in Action.