

The Wayback Machine - http://web.archive.org/web/20150314005300/http://www.metacrylics.com:80/application/over-new-construction-plywood


[Home»Application»Over New Construction Plywood](#)

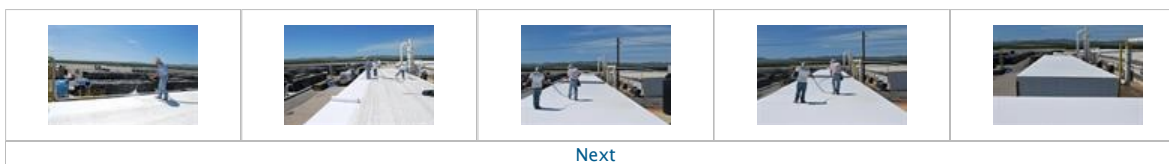
## Metacrylics® Application Over New Construction Plywood

[Printer-friendly version](#)


Metacrylics® Application Chart Application Rate per 1 Roofing SQ (100 sf). Please click on the yellow highlighted boxes below to see the application instructions.

Warranty		Materials Required for 100 ft <sup>2</sup> (1 Roofing Square)					
C=Coating M=Material NDL=Mat'l & Labor	Length	Clear Acrylic BASE	Acrylic WHITE	Georgia Pacific DensDeck®	Atlas FR-10 Slipsheet	Stitchbond Polyester Fabric	3-Course Penetrations Etc.
<b>Installation with 1/4 inch DensDeck® Minimum</b>							
Material	<b>15-Year</b>	-	7 gal	1/4 inch DensDeck®	-	1-ply	All
M/NDL	<b>20-Year</b>	-	8.5 gal	1/4 inch DensDeck®	-	1-Ply	All
M/NDL	<b>30-Year</b>	-	13 gal	1/4 inch DensDeck®	-	2-Ply	5-Course
<b>Installation with 2-Ply Atlas FR-10 Slipsheets</b>							
Material	<b>15-Year</b>	3 gal	7 gal	-	2-Ply	1-Ply	All
M/NDL	<b>20-Year</b>	3 gal	8.5 gal	-	2-Ply	1-Ply	All
M/NDL	<b>30-Year</b>	3 gal	13 gal	-	2-Ply	2-Ply	5-Course

### Metacrylics® in Action


[Next](#)

Visit our [YouTube Profile](#) to see videos of Metacrylics in Action.